

BIAX 44 P




Biaxal mixer – Clean – Safe – Quick

- Barrier-free supply to the mixer from the roller conveyor
- “Push and slide” table: Container is simply pushed into the mixer without having to be lifted
- DYNAX drive: The new drive concept for mixing times of less than one minute, even for heavy materials
- Maximum reliability due to robust design
- Powerful, designed for use in production processes
- Suitable for round and oval containers

Collomix[®]

- Automatic sliding doors
- Clamp - mix - release, all fully automatic
- Fast thanks to its 2.2 kW / 400 V DYNAX drive
- Smooth operation using gentle Biax technology
- Easy to use with LCD display
- Easy to service thanks to easy access and permanent lubrication
- Safety by clamping sensor

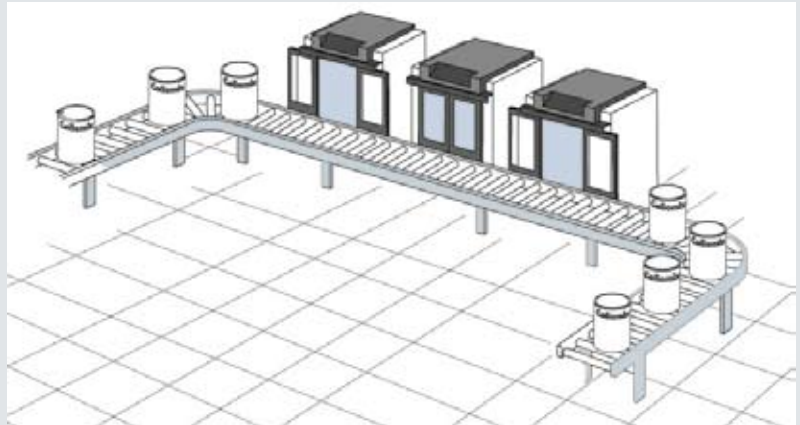

BIAx 44 P



Technical Data

BIAx 44 P

Mixing capacity:	40 kg
Container height:	120 - 440 mm
Max. container diameter, bottom	350 mm
Suitable for Oval Containers:	yes
Lubrication:	Lubrication cartouche
Transport rollers:	yes
Timer buttons:	Three programmable mixing times
Clamping pressure:	Programmable
Programming Parameters:	with Machine keyboard
Colour:	RAL 9003 / RAL 7016
Motor power:	2,2 KW
Power rate (standard):	400 V/50Hz
(option):	400 V/60 Hz
Machine dimensions (w x d x h):	830 x 838 x 1112 mm
Machine weight:	238 kg
Packaging dimensions:	1000 x 1000 x 1350 mm
Packaging weight:	267 kg
Residual- current circuit- breakers:	RCCB, Typ B ≥ 300 mA

Collomix[®]